


**Reference: L01188**

## ELIT12 L01188

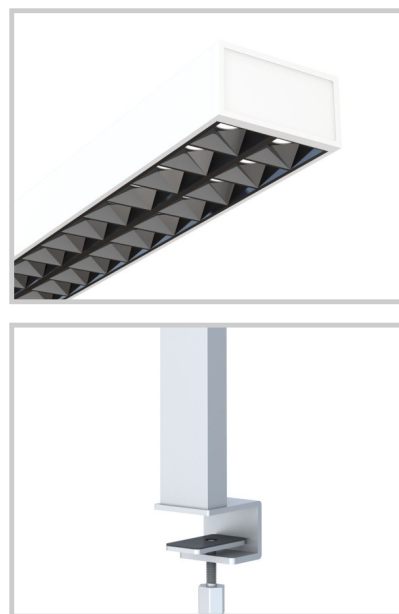

|                        |                          |
|------------------------|--------------------------|
| Lenght (mm)            | 1053                     |
| Width (mm)             | 64                       |
| Height (mm)            | 1200                     |
| System power (W)       | ↑ 55W/25W ↓              |
| Luminous flow (lm)     | ↑ 5500lm/2500lm ↓        |
| Voltage                | 100-277V AC              |
| Degree of protection   | IP20                     |
| Luminaire life (h)     | 50'000H                  |
| Driver lifetime (h)    | 50'000H                  |
| Beam angle             | ↑ 110°/50° ↓             |
| Finishing              | Blanc RAL9003            |
| Light source           | Seoul 2835 LEDs          |
| UGR                    | 6                        |
| IK resistance          | IK05                     |
| MacAdam                | 3                        |
| IRC                    | 80                       |
| Diffuser               | PC                       |
| CDL type               | Direct/Indirect Dimmable |
| Driver output amperage | 1460 mA                  |
| Driver output voltage  | 48 V DC                  |
| Protection class       | Class I                  |
| Warranty               | 5 years                  |
| Color temperature      | 3000K-5700k              |
| Light regulation       | Touche tactile           |
| Operating temperature  | -20°C ~40°C              |
| Presence detector      | PIR                      |

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Light detector

Oui