
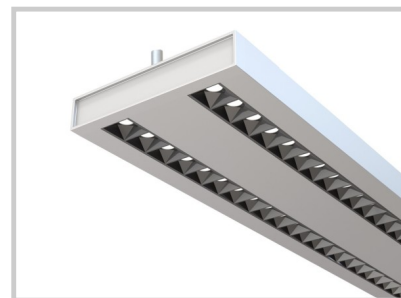


Reference: F01186

ROAD-A F01186

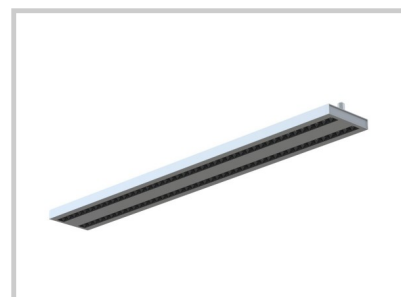

Lenght (mm)	1190
Width (mm)	160
Depth (mm)	30
System power (W)	40W
Luminous flow (lm)	4500lm
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	L80 - 50'000H
Driver lifetime (h)	50'000H
Beam angle	50° ↓
Finishing	Argent RAL9006
Light source	Seoul 2835 LEDs
UGR	10
IK resistance	IK05
MacAdam	SDCM 3
IRC	80
Diffuser	PC
Fixation	Applique
Driver brand	BOKE
Driver output amperage	800-1250mA
Driver output voltage	3-42V DC
Protection class	Class I
Warranty	5 years
Color temperature	3000K
Light regulation	DALI
Operating temperature	T 20° +45° C

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.