
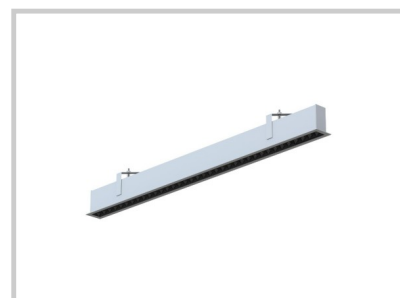
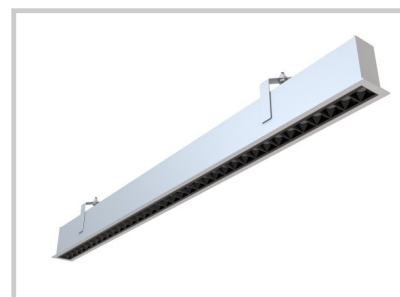


Reference: F01279

LINE-E F01279

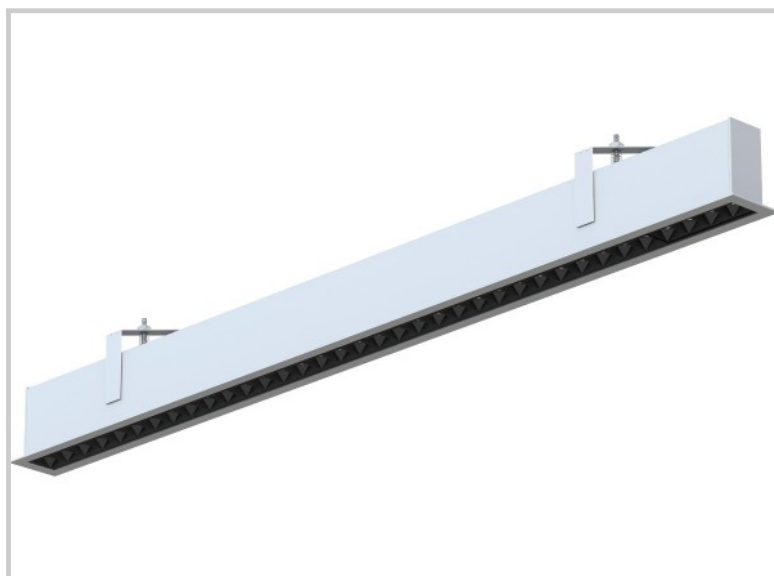

Lenght (mm)	1192
Width (mm)	60
Depth (mm)	80
System power (W)	40W
Luminous flow (lm)	4000lm
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	L80 - 50'000H
Driver lifetime (h)	50'000H
Beam angle	50° ↓
Finishing	Blanc RAL9003
Light source	Seoul 2835 LEDs
UGR	10
IK resistance	IK05
MacAdam	3
IRC	80
Diffuser	PC
Fixation	Encastré
Driver brand	BOKE
Driver output amperage	550-1000mA
Driver output voltage	3-42V
Protection class	Class I
Warranty	5 years
Color temperature	3000K
Light regulation	DALI
Operating temperature	-20°C ~40°C

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.