


**Reference: H20111**

## PRO120 H20111



|                              |                |
|------------------------------|----------------|
| <b>Lenght (mm)</b>           | 1207           |
| <b>Width (mm)</b>            | 113            |
| <b>Depth (mm)</b>            | 143            |
| <b>System power (W)</b>      | 120W           |
| <b>Luminous flow (lm)</b>    | 15600lm        |
| <b>Voltage</b>               | 36V            |
| <b>Degree of protection</b>  | IP65           |
| <b>Beam angle</b>            | 60/90          |
| <b>Finishing</b>             | Argent RAL9006 |
| <b>Light source</b>          | 3030leds       |
| <b>IK resistance</b>         | IK07           |
| <b>Diffuser</b>              | PMMA           |
| <b>Fixation</b>              | Suspendu       |
| <b>Driver brand</b>          | MeanWell       |
| <b>Warranty</b>              | 5 years        |
| <b>Color temperature</b>     | 6500K          |
| <b>Operating temperature</b> | T-25° +65°     |

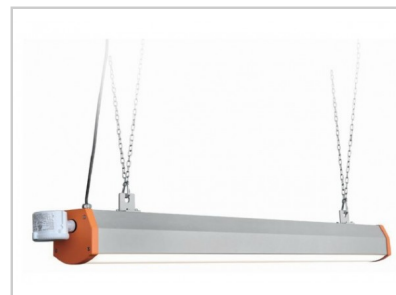