


Reference: F05005

LINE2 F05005

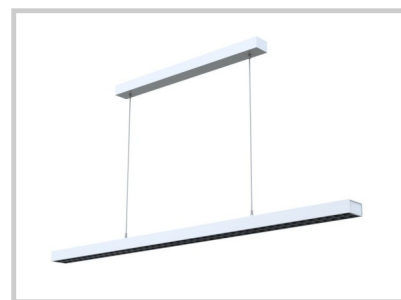

Lenght (mm)	1391
Width (mm)	64
Depth (mm)	35
System power (W)	↑ 35W/35W ↓
Luminous flow (lm)	↑ 3800lm/3800lm ↓
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	L80 - 50'000H
Driver lifetime (h)	50'000H
Beam angle	↑ 115°/50° ↓
Finishing	Blanc RAL9003
Light source	Seoul 2835 LEDs
UGR	6
IK resistance	IK05
MacAdam	SDCM 3
IRC	80
Diffuser	PC
Fixation	Suspendu
Driver brand	BOKE
Driver output amperage	1200-1650mA
Driver output voltage	6-42V DC
Protection class	Class I
Warranty	5 years
Color temperature	4000K
Light regulation	On-off
Operating temperature	T 20° +45° C

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.