


Reference: F05006

LINE2 F05006

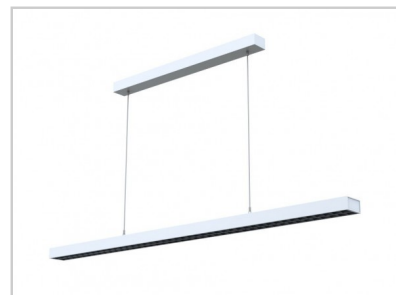

Lenght (mm)	1391
Width (mm)	64
Depth (mm)	35
System power (W)	?35W/35W?
Luminous flow (lm)	?3800lm/3800lm?
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	L80 - 50'000H
Driver lifetime (h)	50'000H
Beam angle	?115°/50°?
Finishing	Blanc RAL9003
Light source	Seoul 2835 LEDs
UGR	6
IK resistance	IK05
MacAdam	SDCM 3
IRC	80
Diffuser	PC
Fixation	Suspendu
Driver brand	BOKE
Driver output amperage	1200-1650mA
Driver output voltage	6-42V DC
Protection class	Class I
Warranty	5 years
Color temperature	6000K
Light regulation	On-off
Operating temperature	T 20° +45° C