
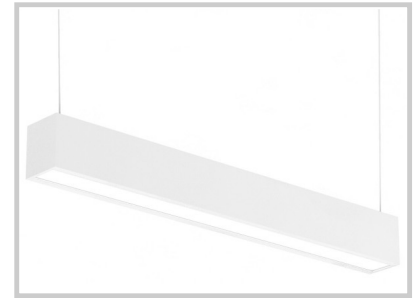


**Reference: C11000**

## ORI 600 C11000

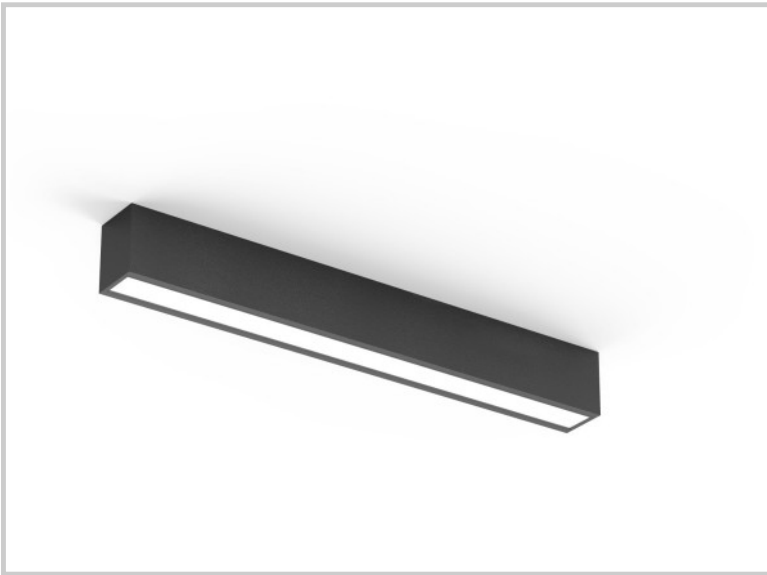

<b>Lenght (mm)</b>	604
<b>Width (mm)</b>	60
<b>Height (mm)</b>	70
<b>System power (W)</b>	20W
<b>Luminous flow (lm)</b>	2400lm
<b>Voltage</b>	200-240V AC
<b>Degree of protection</b>	IP20
<b>Luminaire life (h)</b>	50'000
<b>Driver lifetime (h)</b>	50'000
<b>Beam angle</b>	100°
<b>Finishing</b>	White
<b>Light source</b>	SDM
<b>IRC</b>	>80
<b>Diffuser</b>	Opal
<b>Fixation</b>	Applique / Suspendu
<b>Matter</b>	Aluminium / Plastique
<b>Color temperature</b>	3000K
<b>Light regulation</b>	On / Off
<b>Operating temperature</b>	-20°C ~45°C
<b>Efficiency</b>	~120lm/W
<b>Flicker</b>	Non-scintillant
<b>Weight</b>	1,65Kg

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.