
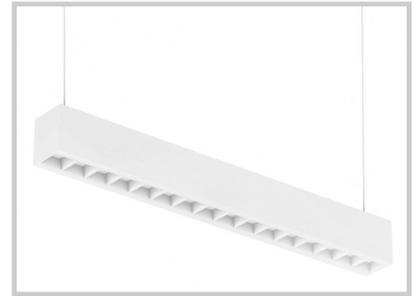


Reference: C11009

## ORI 600 C11009

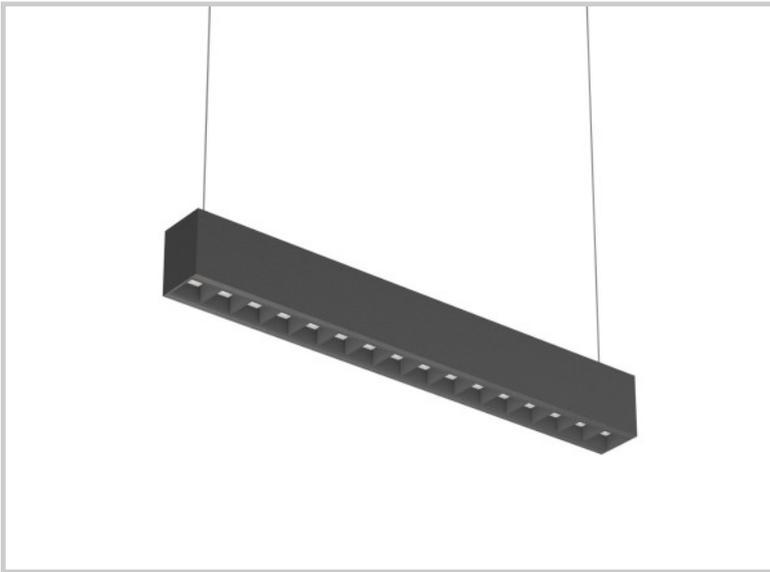

<b>Lenght (mm)</b>	604
<b>Width (mm)</b>	60
<b>Height (mm)</b>	70
<b>System power (W)</b>	20W
<b>Luminous flow (lm)</b>	2400lm
<b>Voltage</b>	200-240V AC
<b>Degree of protection</b>	IP20
<b>Luminaire life (h)</b>	50'000
<b>Driver lifetime (h)</b>	50'000
<b>Beam angle</b>	100°
<b>Finishing</b>	White
<b>Light source</b>	SDM
<b>IRC</b>	>80
<b>Diffuser</b>	Micro-reflecteur
<b>Fixation</b>	Applique / Suspendu
<b>Matter</b>	Aluminium / Plastique
<b>Color temperature</b>	3CCT : 3000K / 4000K / 5700K
<b>Light regulation</b>	On / Off
<b>Operating temperature</b>	-20°C ~45°C
<b>Efficiency</b>	~120lm/W
<b>Notes</b>	Anti-éblouisseur
<b>Flicker</b>	Non-scintillant
<b>Weight</b>	1,65Kg