
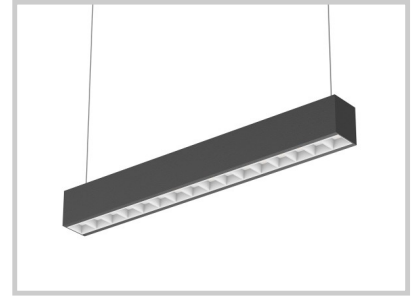
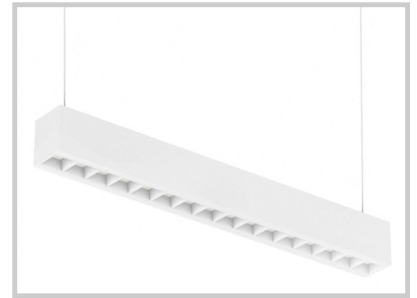


Reference: C11016

ORI 1200 C11016

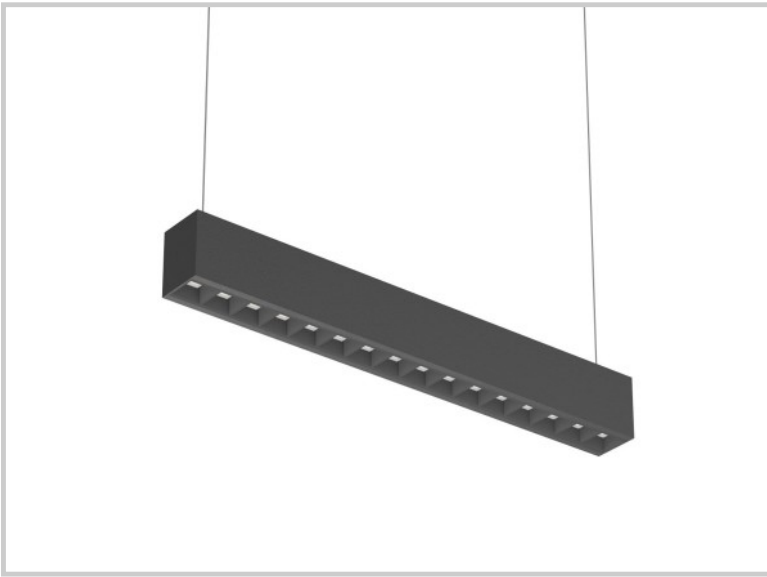

Lenght (mm)	1204
Width (mm)	60
Height (mm)	70
System power (W)	40W
Luminous flow (lm)	4800lm
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	100°
Finishing	White
Light source	SDM
IRC	>80
Diffuser	Micro-reflecteur
Fixation	Applique / Suspendu
Matter	Aluminium / Plastique
Color temperature	4000K
Light regulation	On / Off
Operating temperature	-20°C ~45°C
Efficiency	~120lm/W
Notes	Anti-éblouisseur
Flicker	Non-scintillant
Weight	2,2Kg