


Reference: D32128

Dipper SMD 135 D32128

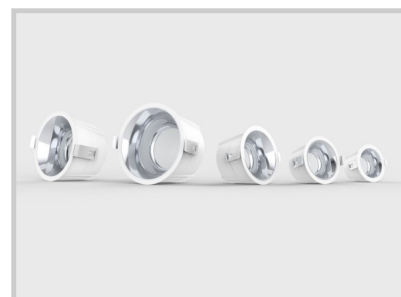

Diameter (mm)	Φ135
Embedding diameter (mm)	Φ125
Recessed length (mm)	96
Embedding depth (mm)	96
System power (W)	25W
Luminous flow (lm)	2025lm
Voltage	AC 220 - 240V
Degree of protection	IP54
Luminaire life (h)	50000
Driver lifetime (h)	50000
Beam angle	60°
Finishing	Blanc (noir sur demande)
Light source	SMD
UGR	< 19
MacAdam	SDCM <3
IRC	>80 (>90 sur demande)
Fixation	Encastré
CDL type	Direct
Protection class	Classe II
Matter	Aluminium
Warranty	5ans
Color temperature	2700K
Light regulation	Dali
Operating temperature	-20° + ~40°C
Efficiency	81lm/W
Reflector	Argent mat

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Dimming range

1 - 100%