


**Reference: D32154**

## Dipper SMD 135 D32154

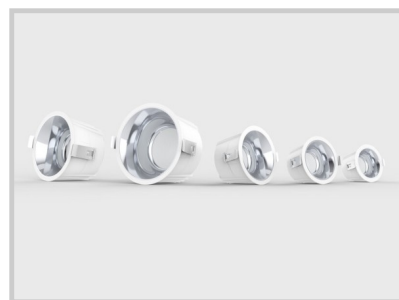

|                         |                          |
|-------------------------|--------------------------|
| Diameter (mm)           | Φ135                     |
| Embedding diameter (mm) | Φ125                     |
| Embedding depth (mm)    | 96                       |
| System power (W)        | 25W                      |
| Luminous flow (lm)      | 2025lm                   |
| Voltage                 | AC 220 - 240V            |
| Degree of protection    | IP54                     |
| Luminaire life (h)      | 50000                    |
| Driver lifetime (h)     | 50000                    |
| Beam angle              | 60°                      |
| Finishing               | Blanc (noir sur demande) |
| Light source            | SMD                      |
| UGR                     | < 19                     |
| MacAdam                 | SDCM <3                  |
| IRC                     | >80 (>90 sur demande)    |
| Fixation                | Encastré                 |
| CDL type                | Direct                   |
| Protection class        | Classe II                |
| Matter                  | Aluminium                |
| Warranty                | 5ans                     |
| Color temperature       | 5000K                    |
| Light regulation        | Dali                     |
| Operating temperature   | -20° + ~40°C             |
| Efficiency              | 81lm/W                   |
| Reflector               | Blanc mat                |
| Dimming range           | 1 - 100%                 |

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.