


Reference: D32271

Dipper SMD 190 D32271

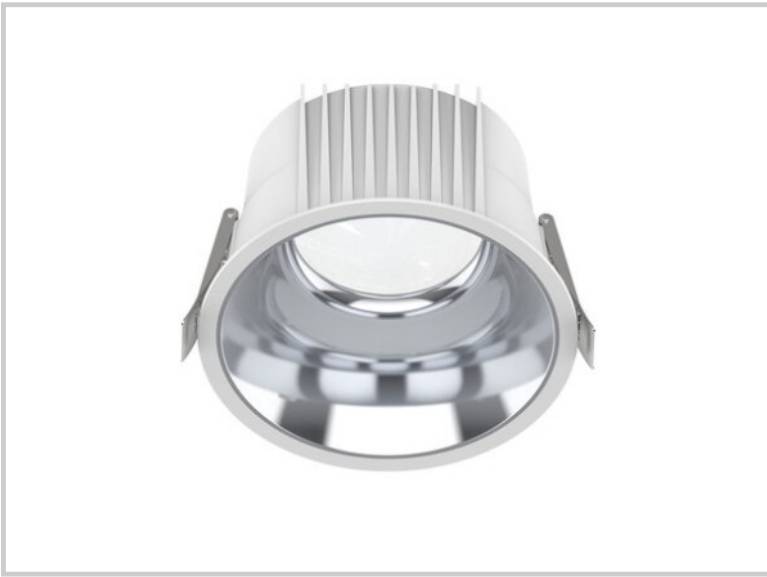

Diameter (mm)	Φ186
Embedding diameter (mm)	Φ175
Embedding depth (mm)	122
System power (W)	42W
Luminous flow (lm)	4200lm
Voltage	AC 220 - 240V
Degree of protection	IP54
Luminaire life (h)	50000
Driver lifetime (h)	50000
Beam angle	60°
Finishing	Blanc (noir sur demande)
Light source	SMD
UGR	< 19
MacAdam	SDCM <3
IRC	>80 (>90 sur demande)
Fixation	Encastré
CDL type	Direct
Protection class	Classe II
Matter	Aluminium
Warranty	5ans
Color temperature	3000K
Light regulation	On / Off
Operating temperature	-20° + ~40°C
Efficiency	100lm/W
Reflector	Noir brillant