


Reference: D38000

Finer 300 D38000

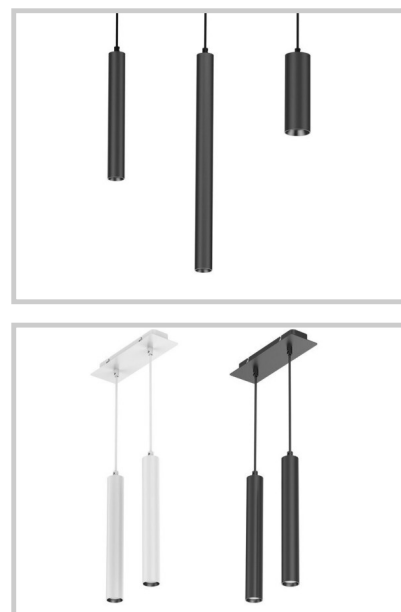

Height (mm)	300
Diameter (mm)	Ø39
System power (W)	5W
Luminous flow (lm)	500
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	20°
Finishing	White
Light source	COB
UGR	<19
IRC	>80
Fixation	Suspendu
Matter	Aluminium
Warranty	5ans
Color temperature	2700K
Light regulation	On / Off
Operating temperature	-20°C ~45°C
Efficiency	100lm/W
Flicker	Sans scintillement
Weight	0,51Kg

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.