


Reference: F8080

## BubblyA A800 F8080

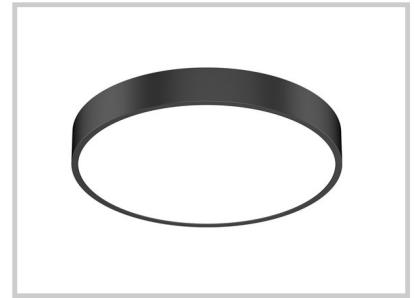

|                         |                    |
|-------------------------|--------------------|
| Height (mm)             | 55                 |
| Diameter (mm)           | Ø800               |
| Embedding diameter (mm) | Ø385 - 415         |
| System power (W)        | 47 - 75W           |
| Luminous flow (lm)      | 5900lm             |
| Voltage                 | 220 - 240V AC      |
| Degree of protection    | IP40               |
| Luminaire life (h)      | 50'000             |
| Driver lifetime (h)     | 50'000             |
| Beam angle              | 85°                |
| Finishing               | Black              |
| Light source            | SMD                |
| IRC                     | >80                |
| Diffuser                | Prismatic          |
| Fixation                | Applique           |
| CDL type                | Direct / Indirect  |
| Protection class        | Classe I           |
| Matter                  | Aluminium          |
| Warranty                | 5ans               |
| Color temperature       | 3000K              |
| Light regulation        | On / Off           |
| Operating temperature   | -20°C +40°C        |
| Efficiency              | 79lm/W             |
| Notes                   | Éclairage direct   |
| Flicker                 | Sans scintillement |
| Weight                  | 3,2Kg              |

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.