


Reference: D40272

Kory X10 D40272

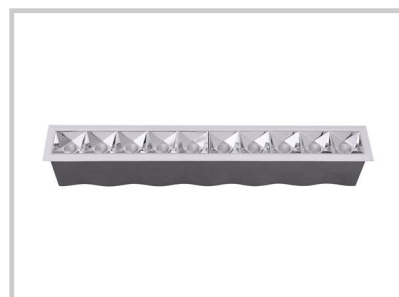

Lenght (mm)	316
Width (mm)	45.5
Height (mm)	50
Recessed length (mm)	310
Largeur encastrement (mm)	40
System power (W)	24W
Luminous flow (lm)	2160lm
Voltage	200 - 240V AC
Degree of protection	IP20
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	12°
Finishing	White
Light source	SMD
UGR	<19
IRC	>90
Fixation	Encastré
CDL type	Direct
Matter	Aluminium et plastique
Warranty	5ans
Color temperature	3000K
Light regulation	On / Off
Operating temperature	- 25°C +65°C
Orientation	Non
Efficiency	102lm/w
Reflector	Chromé

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Flicker

Sans scintillement