


Reference: C5001

Pyrus C5001

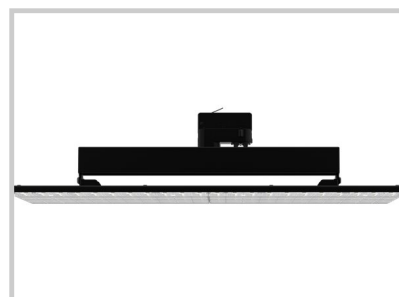

Lenght (mm)	580
Width (mm)	190
Height (mm)	135
System power (W)	Sélectionnable micro-siwitch : 30W / 40W / 45W / 50W / 55W / 60W / 65W / 70W / 80W
Luminous flow (lm)	3900 / 5200 / 5852 / 6500 / 7150 / 7800 / 8450 / 9100 / 10400lm
Voltage	220 - 240V
Degree of protection	IP20
Luminaire life (h)	L90B10 50000 h / L80B20 100000 h 45°C
Driver lifetime (h)	L90B10 50000 h / L80B20 100000 h 45°C
Beam angle	30°
Finishing	Black
IK resistance	IK05
IRC	>90
Diffuser	Optique PMMA
Fixation	Sur rail
CDL type	Direct symétrique
Matter	Aluminium
Warranty	5ans
Color temperature	3000K
Light regulation	On/off
Operating temperature	-25 + 45°C
Orientation	Oui
Efficiency	130lm/W
Flicker	Sans scintillement

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.