


Reference: C5059

## Pyrus C5059

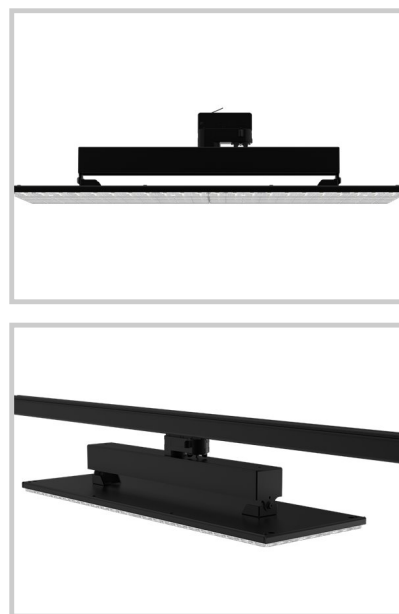

|                       |                                                                                    |
|-----------------------|------------------------------------------------------------------------------------|
| Lenght (mm)           | 580                                                                                |
| Width (mm)            | 190                                                                                |
| Height (mm)           | 135                                                                                |
| System power (W)      | Sélectionnable micro-siwitch : 30W / 40W / 45W / 50W / 55W / 60W / 65W / 70W / 80W |
| Luminous flow (lm)    | 3900 / 5200 / 5852 / 6500 / 7150 / 7800 / 8450 / 9100 / 10400lm                    |
| Voltage               | 220 - 240V                                                                         |
| Degree of protection  | IP20                                                                               |
| Luminaire life (h)    | L90B10 50000 h / L80B20 100000 h 45°C                                              |
| Driver lifetime (h)   | L90B10 50000 h / L80B20 100000 h 45°C                                              |
| Beam angle            | 90°                                                                                |
| Finishing             | White                                                                              |
| IK resistance         | IK05                                                                               |
| IRC                   | >90                                                                                |
| Diffuser              | Optique PMMA                                                                       |
| Fixation              | Sur rail                                                                           |
| CDL type              | Direct symétrique                                                                  |
| Matter                | Aluminium                                                                          |
| Warranty              | 5ans                                                                               |
| Color temperature     | 6500K                                                                              |
| Light regulation      | On/off                                                                             |
| Operating temperature | -25 + 45°C                                                                         |
| Orientation           | Oui                                                                                |
| Efficiency            | 130lm/W                                                                            |
| Flicker               | Sans scintillement                                                                 |

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.