


Reference: **S1478**

Miko 350 S1478

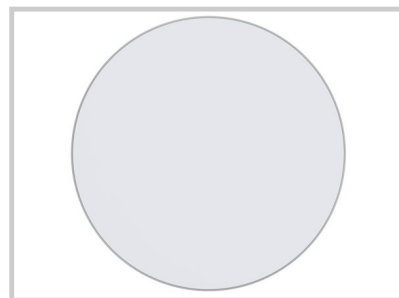

Height (mm)	57
Diameter (mm)	Ø350
System power (W)	Sélectionnable micro-switch 18W / 25W / 30W
Luminous flow (lm)	2200lm / 3000lm / 3500lm
Voltage	220-240V AC
Degree of protection	IP44
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	120°
Finishing	White
Light source	SMD
IK resistance	IK08
IRC	80
Diffuser	Opal
Fixation	Applique
CDL type	Direct et indirect
Protection class	Classe II
Warranty	5ans
Color temperature	2CCT : 3000K + 4000K
Light regulation	On/Off
Operating temperature	-20°C ~45°C
Presence detector	Sur demande
Light detector	Sur demande
Orientation	Non
Efficiency	120lm/W
Flicker	Sans scintillement

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Weight

1,35Kg