


Reference: C45002

## Woudo 190 C45002

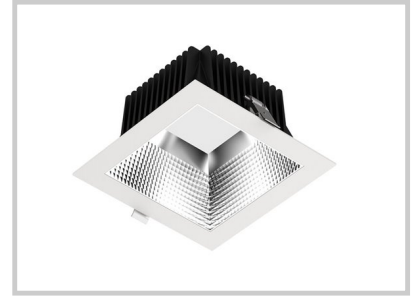

<b>Lenght (mm)</b>	190
<b>Width (mm)</b>	190
<b>Depth (mm)</b>	102
<b>Recessed length (mm)</b>	170
<b>Largeur encastrement (mm)</b>	170
<b>Embedding depth (mm)</b>	102
<b>System power (W)</b>	Paramétrable micro-siwitch : 18W / 22W / 25W / 32W
<b>Luminous flow (lm)</b>	1675lm / 2000lm / 2275lm / 2800lm
<b>Voltage</b>	220 - 240V AC
<b>Degree of protection</b>	IP44 LED sinon IP40
<b>Luminaire life (h)</b>	50'000
<b>Driver lifetime (h)</b>	50'000
<b>Beam angle</b>	60°
<b>Finishing</b>	Black
<b>Light source</b>	SMD
<b>UGR</b>	<19
<b>IK resistance</b>	IK06
<b>IRC</b>	>80
<b>Fixation</b>	Encastré
<b>CDL type</b>	Direct
<b>Protection class</b>	Classe II
<b>Matter</b>	Aluminium + PC
<b>Warranty</b>	5ans
<b>Color temperature</b>	4000K
<b>Light regulation</b>	Dali
<b>Operating temperature</b>	-20°C ~45°C

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

<b>Orientation</b>	Non
<b>Efficiency</b>	~90lm/W
<b>Flicker</b>	Sans scintillement
<b>Weight</b>	1,02Kg