


Reference: C45005

Woudo 190 C45005

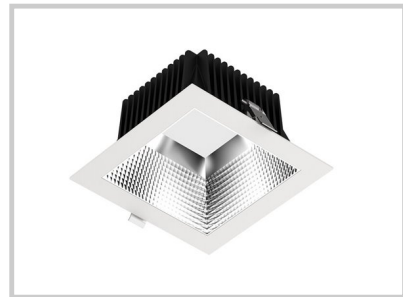

Lenght (mm)	190
Width (mm)	190
Depth (mm)	102
Recessed length (mm)	170
Largeur encastrement (mm)	170
Embedding depth (mm)	102
System power (W)	Paramétrable micro-siwitch : 18W / 22W / 25W / 32W
Luminous flow (lm)	1675lm / 2000lm / 2275lm / 2800lm
Voltage	220 - 240V AC
Degree of protection	IP44 LED sinon IP40
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	60°
Finishing	Black
Light source	SMD
UGR	<19
IK resistance	IK06
IRC	>80
Fixation	Encastré
CDL type	Direct
Protection class	Classe II
Matter	Aluminium + PC
Warranty	5ans
Color temperature	5700K
Light regulation	On/Off
Operating temperature	-20°C ~45°C

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Orientation	Non
Efficiency	~90lm/W
Flicker	Sans scintillement
Weight	1,02Kg