


**Reference: S1526**

## Zippy 275 S1526

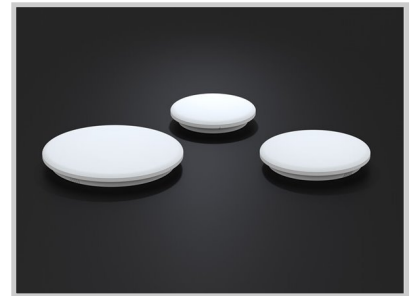

<b>Height (mm)</b>	48
<b>Diameter (mm)</b>	Ø275
<b>System power (W)</b>	18W
<b>Luminous flow (lm)</b>	1200lm
<b>Voltage</b>	220-240V AC
<b>Degree of protection</b>	IP54
<b>Luminaire life (h)</b>	50'000
<b>Driver lifetime (h)</b>	50'000
<b>Beam angle</b>	120°
<b>Finishing</b>	White
<b>Light source</b>	SMD
<b>IK resistance</b>	IK08
<b>IRC</b>	>80
<b>Diffuser</b>	Opal
<b>Fixation</b>	Applique
<b>CDL type</b>	Direct
<b>Protection class</b>	Classe II
<b>Matter</b>	PC
<b>Warranty</b>	5ans
<b>Color temperature</b>	5700K
<b>Light regulation</b>	On / Off
<b>Operating temperature</b>	-20°C~45°C
<b>Presence detector</b>	Oui
<b>Light detector</b>	Oui
<b>Orientation</b>	Non
<b>Efficiency</b>	~100lm/W

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

<b>Notes</b>	Peut être posé en applique murale
<b>Flicker</b>	Sans scintillement
<b>Weight</b>	0,8Kg