


Reference: **S1529**

## Zippy 275 S1529

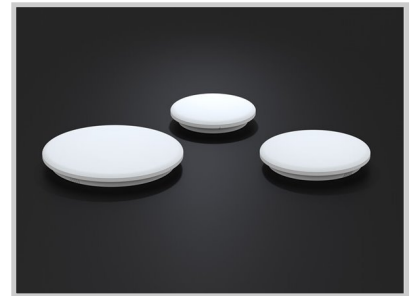

Height (mm)	48
Diameter (mm)	Ø275
System power (W)	18W
Luminous flow (lm)	1200lm
Voltage	220-240V AC
Degree of protection	IP54
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	120°
Finishing	White
Light source	SMD
IK resistance	IK08
IRC	>80
Diffuser	Opal
Fixation	Applique
CDL type	Direct
Protection class	Classe II
Matter	PC
Warranty	5ans
Color temperature	3CCT : 3000K / 4000K / 5700K
Light regulation	Dali
Operating temperature	-20°C~45°C
Presence detector	Oui
Light detector	Oui
Orientation	Non
Efficiency	~100lm/W

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

<b>Notes</b>	Peut être posé en applique murale
<b>Flicker</b>	Sans scintillement
<b>Weight</b>	0,8Kg