
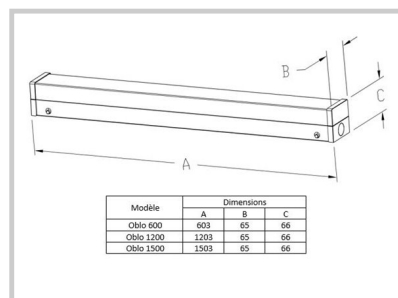


**Reference: C12900**

## Oblo 600 C12900

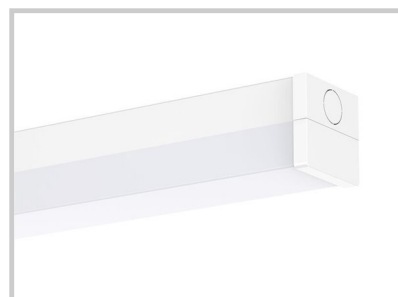

|                       |                                       |
|-----------------------|---------------------------------------|
| Lenght (mm)           | 603                                   |
| Width (mm)            | 65                                    |
| Height (mm)           | 66                                    |
| System power (W)      | Paramétrable micro switch : 10W / 20W |
| Luminous flow (lm)    | 1200lm / 2300lm                       |
| Voltage               | 220 - 240V AC                         |
| Degree of protection  | IP20                                  |
| Luminaire life (h)    | 50'000                                |
| Driver lifetime (h)   | 50'000                                |
| Beam angle            | 120°                                  |
| Finishing             | White                                 |
| Light source          | SMD                                   |
| IK resistance         | IK08                                  |
| IRC                   | >80                                   |
| Diffuser              | Opal                                  |
| Fixation              | Applique / Suspendu                   |
| Matter                | Tôle d'acier laminée et plastique     |
| Warranty              | 5ans                                  |
| Color temperature     | 3CCT : 3000K / 4000K / 5700K          |
| Light regulation      | On / Off                              |
| Operating temperature | -20°C ~40°C                           |
| Efficiency            | 120lm/W                               |
| Notes                 | Eclairage de secours sur demande      |
| Flicker               | Sans scintillement                    |
| Weight                | 0,88Kg                                |