
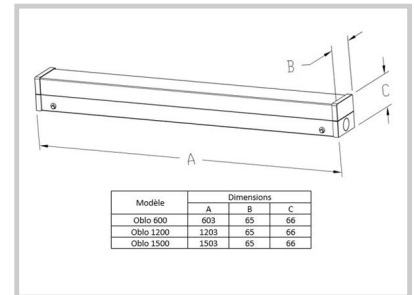


Reference: C12902

Oblo 1500 C12902

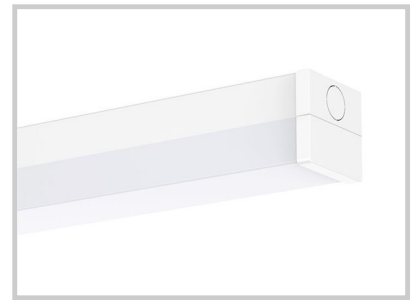

Lenght (mm)	1503
Width (mm)	65
Height (mm)	66
System power (W)	Paramétrable micro switch : 35W / 60W
Luminous flow (lm)	4100lm / 6250lm
Voltage	220 - 240V AC
Degree of protection	IP20
Luminaire life (h)	50'000
Driver lifetime (h)	50'000
Beam angle	120°
Finishing	White
Light source	SMD
IK resistance	IK08
IRC	>80
Diffuser	Opal
Fixation	Applique / Suspensu
Matter	Tôle d'acier laminée et plastique
Warranty	5ans
Color temperature	3CCT : 3000K / 4000K / 5700K
Light regulation	On / Off
Operating temperature	-20°C ~40°C
Efficiency	105lm/W
Notes	Eclairage de secours sur demande
Flicker	Sans scintillement
Weight	1,7Kg