
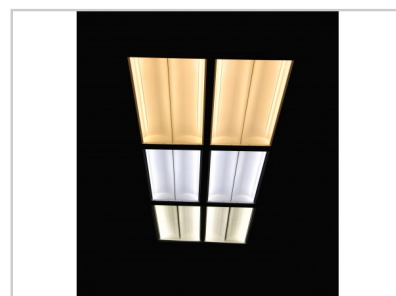
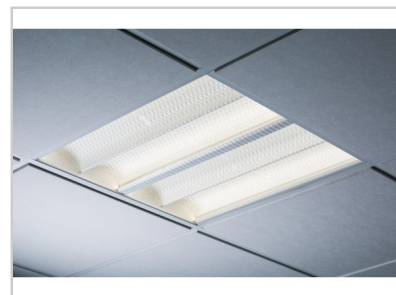


Reference: P02007

## Lunar3012 P02007

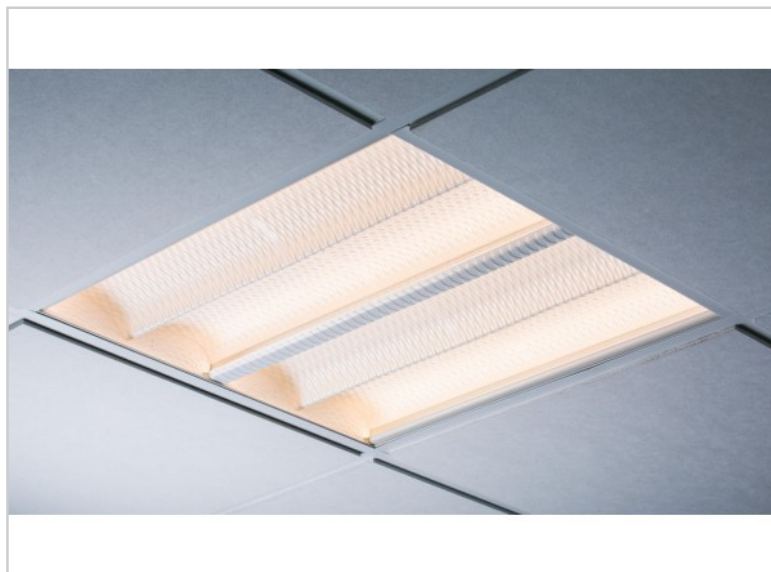

|                         |             |
|-------------------------|-------------|
| Depth (mm)              | 1195mm      |
| Diameter (mm)           | 295mm       |
| Embedding diameter (mm) | 55mm        |
| System power (W)        | 34W         |
| Luminous flow (lm)      | 3400lm      |
| Voltage                 | 200-240V AC |
| Degree of protection    | IP20        |
| Luminaire life (h)      | 50'000H     |
| Driver lifetime (h)     | 50'000H     |
| Beam angle              | 120°        |
| Finishing               | Blanc       |
| Light source            |             |
| UGR                     | 19          |
| IK resistance           | IK08        |
| MacAdam                 | 4           |
| Driver output amperage  | 750mA       |
| Driver output voltage   | 24-42V      |
| Protection class        | Class ?     |
| Warranty                | 5 years     |
| Color temperature       | 5000K       |
| Light regulation        | DALI        |
| Operating temperature   | -20? ~40?   |