
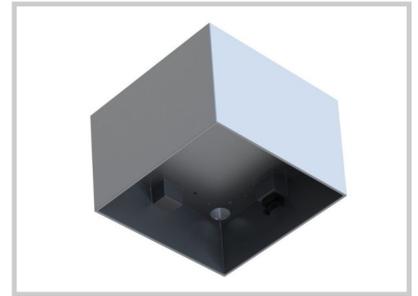


Reference: D20407

HALO9A D20407

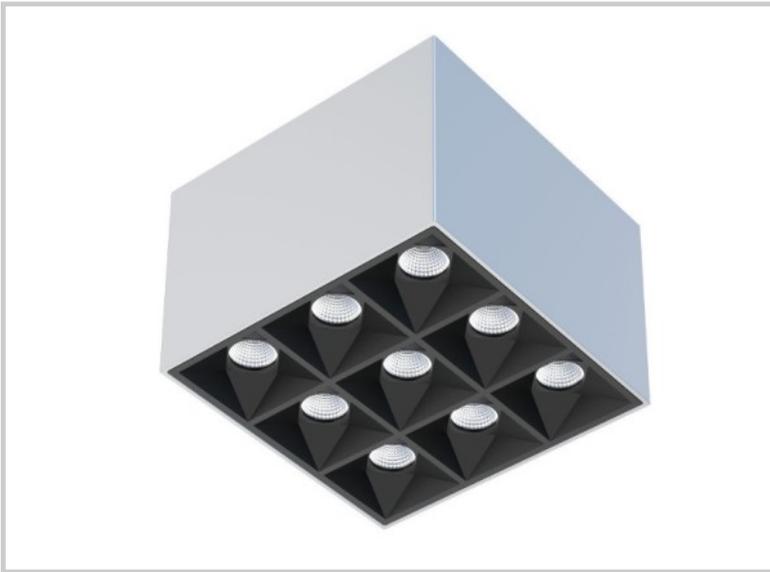

Lenght (mm)	128
Width (mm)	128
Depth (mm)	88
System power (W)	8W
Luminous flow (lm)	850lm
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	50'000H
Driver lifetime (h)	50'000H
Beam angle	35°
Finishing	Argent RAL9006
Light source	LED 3535
UGR	14
MacAdam	3
IRC	80
Diffuser	PC
Fixation	Applique
CDL type	Direct
Driver brand	BOKE
Driver output amperage	250mA
Driver output voltage	25-42V
Protection class	Class II
Matter	
Warranty	5 years
Color temperature	4000K
Light regulation	On-off

Operating temperature

-20°C ~40°C

