
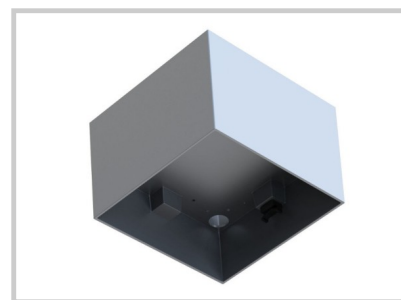


**Reference: D20468**

## HALO9A D20468

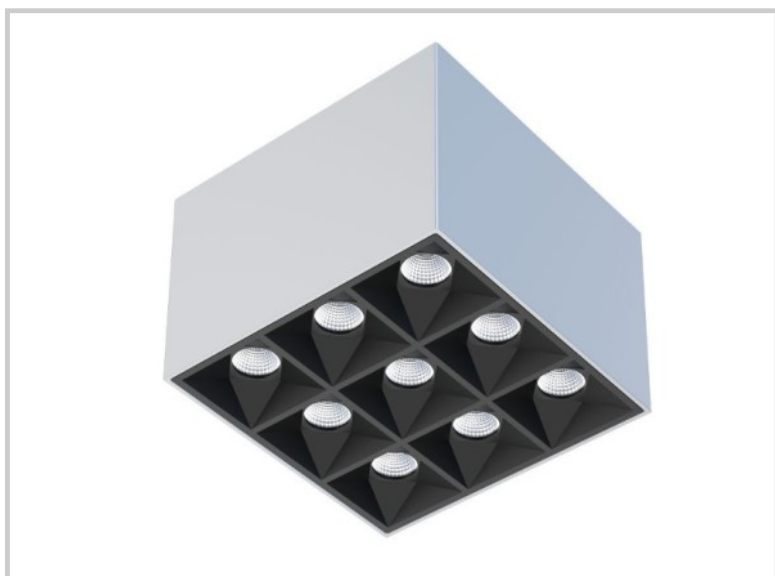

|                               |               |
|-------------------------------|---------------|
| <b>Lenght (mm)</b>            | 128           |
| <b>Width (mm)</b>             | 128           |
| <b>Depth (mm)</b>             | 88            |
| <b>System power (W)</b>       | 18W           |
| <b>Luminous flow (lm)</b>     | 1900lm        |
| <b>Voltage</b>                | 200-240V AC   |
| <b>Degree of protection</b>   | IP20          |
| <b>Luminaire life (h)</b>     | 50'000H       |
| <b>Driver lifetime (h)</b>    | 50'000H       |
| <b>Beam angle</b>             | 35°           |
| <b>Finishing</b>              | Blanc RAL9003 |
| <b>Light source</b>           | LED 3535      |
| <b>UGR</b>                    | 14            |
| <b>MacAdam</b>                | 3             |
| <b>IRC</b>                    | 80            |
| <b>Diffuser</b>               | PC            |
| <b>Fixation</b>               | Applique      |
| <b>CDL type</b>               | Direct        |
| <b>Driver brand</b>           | BOKE          |
| <b>Driver output amperage</b> | 600mA         |
| <b>Driver output voltage</b>  | 25-42V        |
| <b>Protection class</b>       | Class II      |
| <b>Matter</b>                 |               |
| <b>Warranty</b>               | 5 years       |
| <b>Color temperature</b>      | 4000K         |
| <b>Light regulation</b>       | On-off        |

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

Operating temperature

-20°C ~40°C

