


Reference: P04028

PANO6012 P04028



| | |
|----------------------------------|----------|
| Recessed length (mm) | 595mm |
| Largeur encastrement (mm) | 1195 |
| Embedding depth (mm) | 12 |
| System power (W) | 54W |
| Luminous flow (lm) | 5257lm |
| Voltage | 32-42V |
| Degree of protection | IP40 |
| Luminaire life (h) | 50'000H |
| Driver lifetime (h) | 90'000H |
| Beam angle | 120° |
| Light source | SMD2835 |
| UGR | 22 |
| IK resistance | IK06 |
| MacAdam | 3 |
| IRC | 80 |
| Fixation | Encastré |
| Driver brand | Lifud |
| Driver output amperage | |
| Driver output voltage | 220-240V |
| Warranty | 3 years |
| Color temperature | 5000K |
| Light regulation | On-off |
| Operating temperature | 0° - 40° |

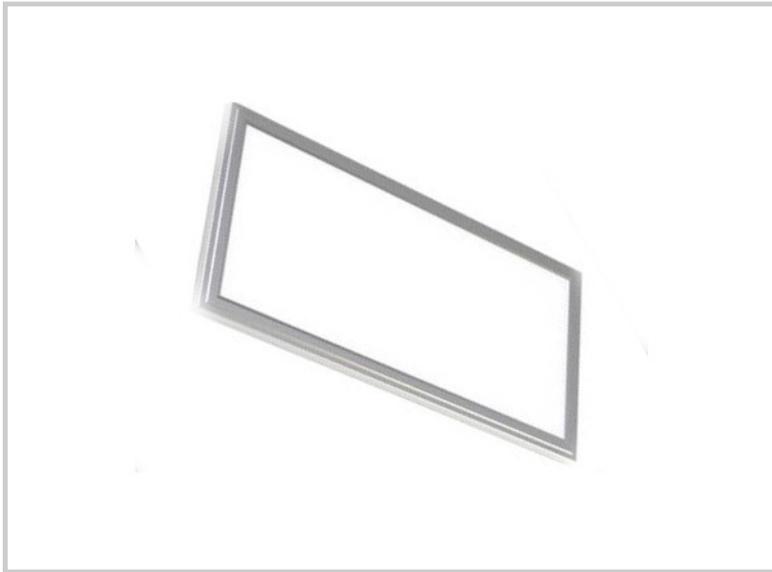