


Reference: P04044

UGLO3012 P04044

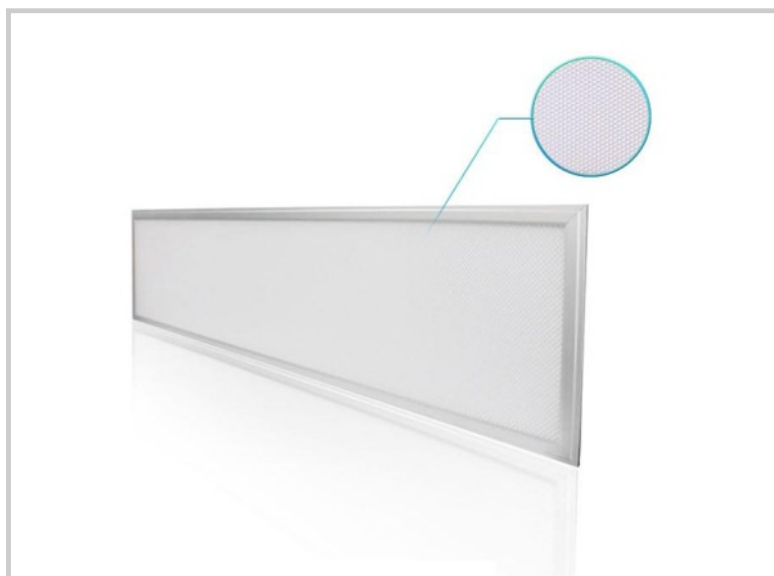

Recessed length (mm)	295mm
Largeur encastrement (mm)	1195
Embedding depth (mm)	12
System power (W)	36W
Luminous flow (lm)	3471lm
Voltage	32-42V
Degree of protection	IP40
Luminaire life (h)	50'000H
Driver lifetime (h)	90'000H
Beam angle	120°
Light source	SMD2835
UGR	22
IK resistance	IK06
MacAdam	3
IRC	80
Diffuser	Microprismatic
Fixation	Encastré
Driver brand	Lifud
Driver output amperage	0.95A
Driver output voltage	220-240V
Warranty	3 years
Color temperature	5000K
Light regulation	On-off
Operating temperature	0° - 40°

Sous réserve de modifications techniques car nos produits sont constamment améliorés.
We reserve the right to make technical changes as our products are constantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.