



Reference: P04057

## UPDN3060 P04057

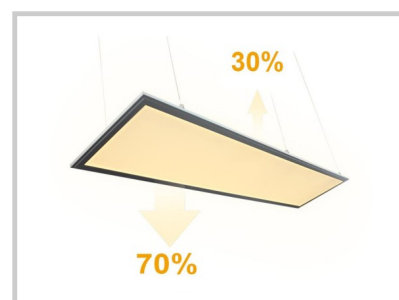

|                           |          |
|---------------------------|----------|
| Recessed length (mm)      | 295mm    |
| Largeur encastrement (mm) | 595      |
| Embedding depth (mm)      | 10       |
| System power (W)          | 18W      |
| Luminous flow (lm)        | 1829lm   |
| Voltage                   | 32-42V   |
| Degree of protection      | IP40     |
| Luminaire life (h)        | 50'000H  |
| Driver lifetime (h)       | 90'000H  |
| Beam angle                | 120°     |
| Light source              | SMD2835  |
| UGR                       | 22       |
| IK resistance             | IK06     |
| MacAdam                   | 3        |
| IRC                       | 80       |
| Fixation                  | Suspendu |
| Driver brand              | Lifud    |
| Driver output amperage    |          |
| Driver output voltage     | 220-240V |
| Warranty                  | 3 years  |
| Color temperature         | 6000K    |
| Light regulation          | On-off   |
| Operating temperature     | 0° - 40° |

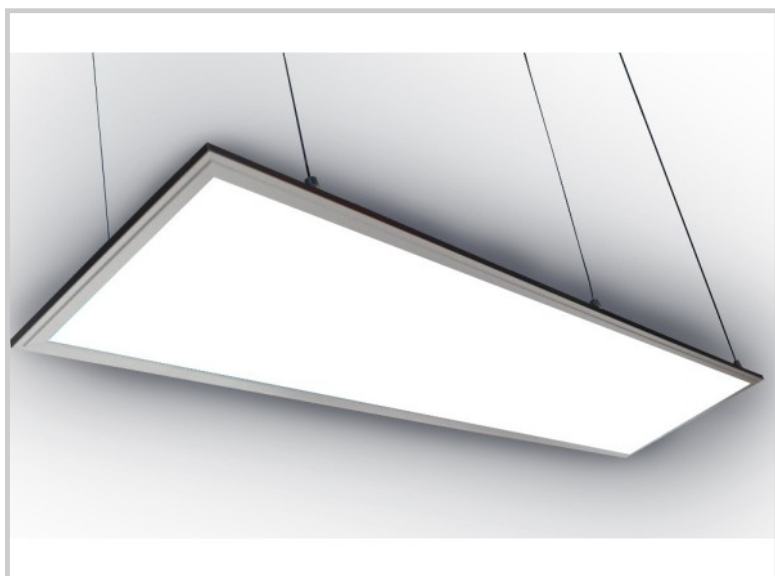